
LabelMax35



The LabelMax35 tabletop labeler is a compact and economically-priced label applicator that is ideal for production rates of up to 35 containers per minute. The LabelMax35 features a Programmable Logic Controller (PLC) that manages specific functions of the operation. The computerized controls are simple and dependable, and allow the operator to match speeds of the labeler to the pre-set conveyor speed. Optical sensors ensure smooth and trouble-free operation. The touchscreen Front Panel Display provides real-time information on the labeling process. The unit's simplicity makes it ideal for packaging lines requiring frequent changeovers on a wide variety of products.

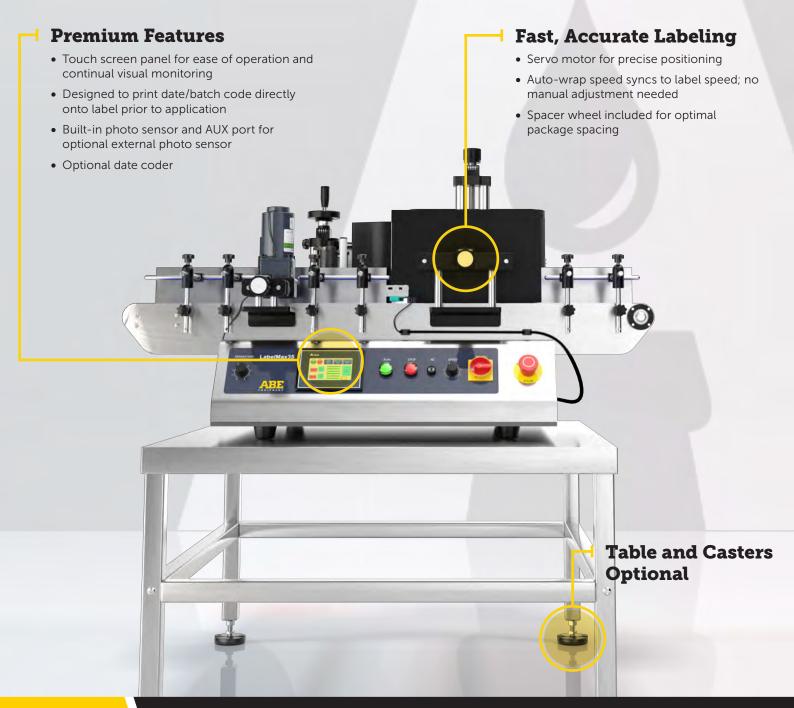

LabelMax35

Specifications

Face Stock: Non-Transparent

• Spool diameter: 11.8" (300 mm)

• Inner core: 3" (76 mm)

• 220 volt 50/60 Hz

• Net weight: 100 Kg

Additional Specs

Maximum Label Width: 5.9" (149.86 mm)

• Minimum Label Width: 2.5" (63.5 mm)

• Maximum Label Length: 11.75" (298.45 mm)

• Minimum Label Length: 2.5" (63.5 mm)

Maximum Spool Diameter: 11.5" (292.1 mm)


Your Complete Package

Each LabelMax35 that leaves our facility carries UL certification and an industry-leading five year limited warranty on the metal and welds. In addition to a comprehensive spare parts inventory, you'll receive superior customer support from our team in Lincoln, Nebraska with any ABE purchase.

Compatible Products

- TruPatriot Bottle Filler
- CraftCan Canning Systems
- Autopak Can Carrier Applicator



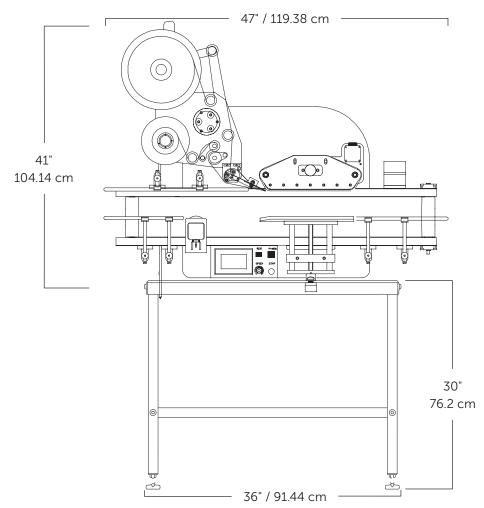

ABE Equipment reserves the right to change specification without notice. All specifications are approximate. ©2024 ABE Equipment

